

# CT240 Series

Use a touchtone phone to heat your cottage or home just in time for your arrival



## MODEL & RATINGS

**CT240-01**      1 low voltage output (12 VDC)  
 1 universal relay output (dry contact)  
 Both outputs operate simultaneously

## SPECIFICATIONS

### POWER SUPPLY

9 VAC / 60Hz (adapter and phone cable included)

### OUTPUTS

Low voltage output (12 VDC)

Universal relay output

5 A @ 30 VAC inductive P.F. 0.4



10 A @ 30 VAC resistive

10 A @ 120/240 VAC resistive (electrical box req.)

### DIMENSIONS

69 x 137 x 31 mm / 2.7 x 5.4 x 1.2 inches

## INSTALLATION

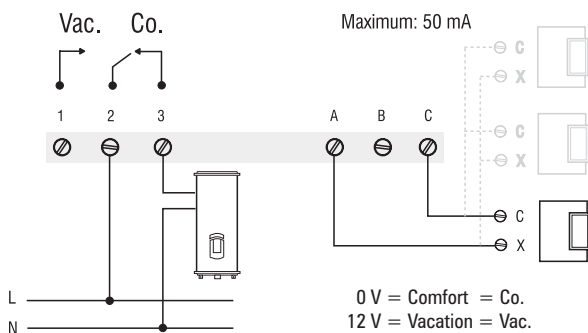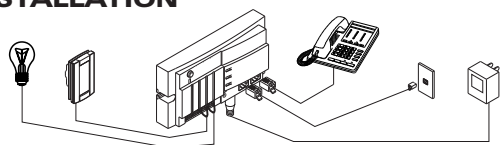

## FEATURES

**Low voltage output** (1) works with thermostats operating on 12 VDC signals

**Universal output** (1) works with thermostats or household devices operating with dry contacts

**Connects directly** to existing phone line

**Activated by home/cell phones** and is compatible with answering machines

**One-touch buttons** enable manual override of controller output status

**LEDs** show output status

**Password-protected** for secure access

**Battery-free backup** saves user settings and output status after a power outage

### COMPATIBLE WITH AUBE THERMOSTATS:

TH106 (p. 14)

TH110-SP-P-COM (p. 16)

TH113 Series for baseboards and convectors (p. 17)

TH115 Series for baseboards and convectors (p. 18)

TH116 Series for baseboards and convectors (p. 19)

