

RT850

Solid State Relays

Compatible with VAC or VDC signals, the RT850 enables unparalleled temperature precision in complete silence

MODEL & RATINGS

RT850	2760 W @ 120 V	23 A resistive
	4780 W @ 208 V	23 A resistive
	5520 W @ 240 V	23 A resistive
	6370 W @ 277 V	23 A resistive
	7980 W @ 347 V	23 A resistive

All above models operate on 50/60 Hz



Without transformer

SPECIFICATIONS

CONTROL SIGNAL

AC: 24 V / 32 mA
DC: 4 to 32 V / 16 mA

GUARANTEED OFF SIGNAL

V off < 5 VAC / V off < 2 VDC

HUMIDITY LIMITS

0% to 95% non-condensing

TERMINAL WIRE SIZE

12 AWG

DIMENSIONS (H•W•D)

107 x 106 x 48 mm / 4.2 x 4.2 x 1.9 inches

FEATURES

Enables superior temperature control when used with 15-second cycle thermostats

Dual input: Compatible with a 24 VAC or 4-32 VDC signal


Compatible with all 24 V thermostats with 2-wire connections (R, W) or 3-wire connections (R, W, C)

Heating command indicator light gives at-a-glance verification of relay operation

Simple installation in standard 4" x 4" electrical box

Terminal board connection enables easy installation

INSTALLATION

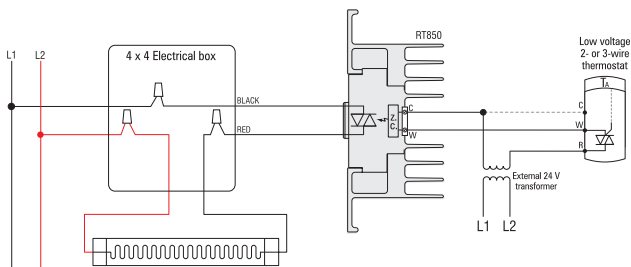

COMPATIBLE WITH AUBE THERMOSTATS:

- TH114-A-024T-15S
- TH115-A-024T-15S
- TH150 Series



3 year warranty